





Full Electric Stacker CDD-A Series

■ Designed for stacking pallets on high racks, the lifting height can be increased in certain conditions.

- Capacity : 1.2-1.5 ton.
- Max. Lifting Height : 4.5-5.5 m.
- Can be installed with new Tiller from REMA, Germany.
- The platform pedal, defending bars and wide straddle leg are available.
- Heavy duty design with "H" style mast material.
- Imported electric control system and hydraulic unit.
- Operating steady and flexible.
- Low noise, no pollution, and high reliability.
- International typical style.
- Conforms to EN 1757-1:2001, EN1726.

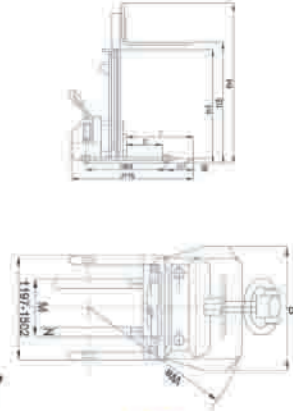

Model	CDD1.2A				CDD1.5A	
	CDD1.2A/45	CDD1.2A/55	CDD1.5A/45	CDD1.5A/55	CDD1.5A/55	CDD1.5A/55
Standard (CDD-A)						
With Stand-On Platform (CDD-A-T)	CDD1.2A/45T	CDD1.2A/55T	CDD1.5A/45T	CDD1.5A/55T	CDD1.5A/55T	CDD1.5A/55T
With Wide Straddle Leg (CDD-A-W)	CDD1.2A/45W	CDD1.2A/55W	CDD1.5A/45W	CDD1.5A/55W	CDD1.5A/55W	CDD1.5A/55W
Capacity	Q	kg	1200			1500
Load Center	C	mm		600		
Min. Fork Height		mm		90		
Max. Lifting Height	H3	mm	4500	5500	4500	5500
Free Lifting Height		mm	1550	1717	1550	1717
Min. Height of Stacker	h1	mm	2175	2508	2175	2508
Max. Height of Stacker	h4	mm	5373	6373	5373	6373
Fork Length		mm		1150		
Overall Length	L	mm		2175		
	CDD-A-W	mm		2507		
Overall Width	B	mm		940		
	CDD-A-W	mm		1080		
Single Fork Width	N	mm		160		
	CDD-A-W	mm		100		
Fork Width	M	mm		560 steel plate forks		
	CDD-A-W	mm		200-950mm adjustable forged plate forks		
Overall Width of Legs		mm		720		
	CDD-A-W	mm		1197-1502		
Min. Turning Radius	Wa	mm		1525		
Traveling Speed (Loaded/Unloaded)		km/h		5.2/6.8		
Lifting Speed (Loaded/Unloaded)		mm/s		127/170		
Lowering Speed (Loaded/Unloaded)		mm/s		150/128		
Motor	Traveling	kw/v		1.2/24		
	Lifting	kw/v		3.0/24		
Front Wheel		mm		Φ78x70		
Balance Wheel		mm		Φ150x75		
Drive Wheel		mm		Φ250x80		
Battery		Ah/V		240/24 230kg		
Battery Charger		V/A		24/30		
Net Weight	CDD-A	kg	1530	1548	1630	1648
(Without Battery)	CDD-A-T	kg	1533	1552	1633	1652
	CDD-A-W	kg	1580	16000	1683	1700

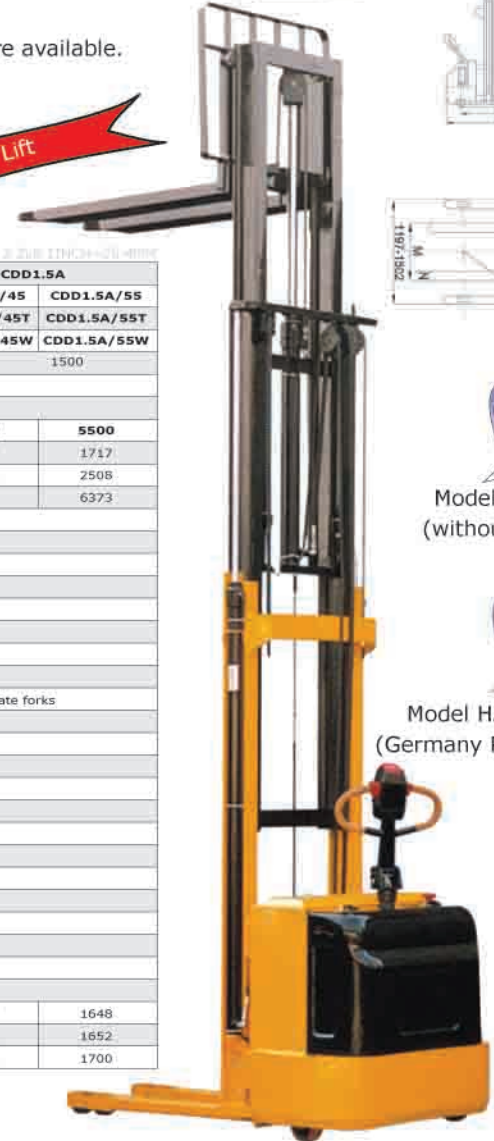

CDD-A Standard ↑

Model HA240 handle (without key) is option

Model HA230 handle (Germany REMA) is option



CDD-A standard ↑



CDD-A-T with platform ↑



CDD-A-T with platform and handrail ↑




CDD-A-W with wider straddle leg ↑


Full Electric Stacker CDD-B Series

■ Double cylinders are mounted on both side for wide view while loading and transporting.

- Capacity : 1.2-1.5 ton.
- Max. Lifting Height : 1.6-3.3 m.
- Designed for stacking pallets on trucks and transporting goods for short distance.
- High-comfort tiller grip reduces fatigue, improving productivity.
- Heavy-duty design with top quality mast construction.
- Powerful drive and power unit made in Europe.
- Top quality electronic control system made in Europe.
- Conforms to EN1757-1:2001.

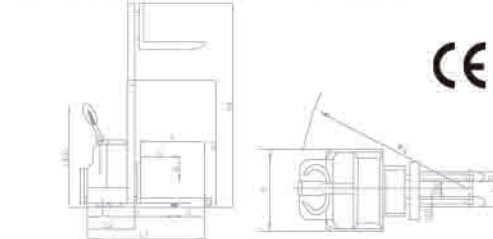

CDD-B-T with platform ↑
CDD-B-T with platform and handrail ↑
CDD-B-W with wider straddle leg ↑

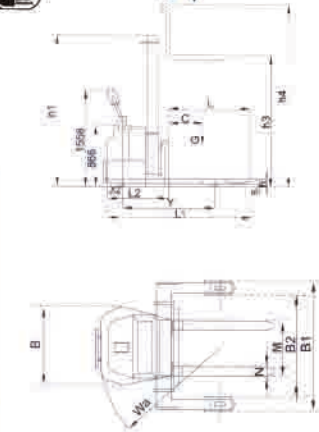

CDD-B Standard ↑

Model HA240 handle (without key) is option

Model HA230 handle (Germany REMA) is option

Model	CDD1.2						CDD1.5							
	CDD1.2B/24	CDD1.2B/29	CDD1.2B/31	CDD1.2B/33	CDD1.2B/33T	CDD1.2B/33T	CDD1.5B/24	CDD1.5B/29	CDD1.5B/31	CDD1.5B/33	CDD1.5B/33T			
Standard (CDD-B)														
With Stand-On Platform (CDD-B-T)														
With wide Straddle Leg (CDD-B-W)														
Capacity	G	kg	1200						1500					
Load Center	C	mm	600						600					
Min. Fork Height	h	mm	85						85					
	CDD-B-W	mm	65						65					
Max. Lifting Height	H3	mm	1600	2450	2900	3100	3300	1600	2450	2900	3100	3300		
Max. Height of Stacker	h4	mm		3094	3544	3744	3944		3094	3544	3744	3944		
	CDD-B-T	mm	2460	3310	3760	3960	4160	2460	3310	3760	3960	4160		
Height of Stacker	h1	mm		1800	2025	2125	2225		1800	2025	2125	2225		
	CDD-B-W	mm	2166	1876	2101	2201	2301	2166	1876	2101	2201	2301		
Length of Stacker	L1	mm	2073						2073					
	CDD-B-T	mm	2567						2567					
	CDD-B-W	mm	1972						1972					
Fork Length	L	mm	1150 (Steel plate forks)						1150 (Steel plate forks)					
	CDD-B-W	mm	1000 (Forged plate forks)						1000 (Forged plate forks)					
Fork Width	M	mm	540						540					
	CDD-B-W	mm	230-790						230-790					
Single Fork Width	N	mm	160						160					
	CDD-B-W	mm	100						100					
Width of Stacker	B	mm	860						860					
	CDD-B-W	mm	940	940	940	1080	1080	940	940	940	1080	1080		
Overall Width of Legs	B1	mm	700						700					
	CDD-B-W	mm	1197-1502 (Adjustable)						1197-1502 (Adjustable)					
Turning Radius	Wa	mm	1560						1560					
	CDD-B-W	mm	1533	1533	1533	1548	1548	1533	1533	1533	1548	1548		
Motors	Traveling	kw/V	1.2/24						1.2/24					
	Lifting	kw/V	2.2/24						2.2/24					
Travelling Speed With/Without Load		km/h	4.0/5.5						4.0/5.5					
Lifting Speed With/Without Load		mm/s	95/122						95/122					
Lowering Speed With/Without Load		mm/s	110/60						110/60					
Double Front Wheel		mm	Φ78x70						Φ78x70					
Balance Wheel		mm	Φ150x75						Φ150x75					
Drive Wheel		mm	Φ250x80						Φ250x80					
Battery (Service Free)		Ah/V	200/24						200/24					
Option Traction Battery		Ah/V	240/24						240/24					
Net Weight (without battery)	CDD-B	kg		730	758	770	782		780	808	820	832		
	CDD-B-T	kg		733	762	773	785		783	812	823	835		
	CDD-B-W	kg	820	885	895	905	910	870	935	945	905	960		